

BLA ETECH PVT. LTD.


EMC, EMI FILTER & POWER SOLUTION

Single Phase Filter BLIC02-XX-F

General Purpose Entry Module EMI Filter



CIRCUIT DIAGRAM:

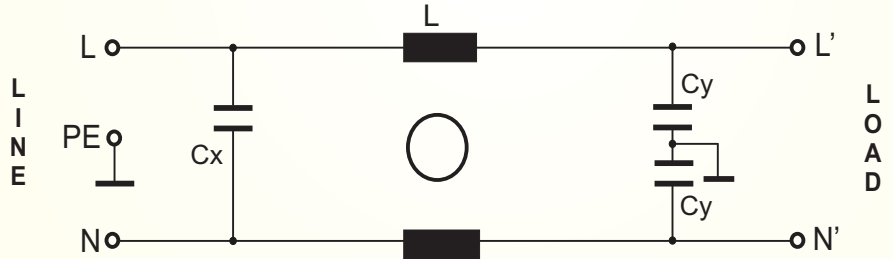

Technical Specification

Max Rated Voltage 250VAC

Operating Frequency 50/60Hz

Rated Current 1A to 10A @40°C

Hipot Test Voltage-

L-L 1450 VDC 2sec

L-G 2250 VDC 2sec

Temperature Range -25 to +85°C(25/85/21)

- Rated currents from 1 to 10A
- Single stage filter
- High differential mode attenuation
- Optional medical versions (M type)

Applications:

- Power Control Equipment for Power Distribution Lines
- Industrial Equipment Vulnerable to Transients on the AC Power Line (Computers, Traffic Controls, Motor Controllers, Etc.)
- Communications systems and other heavy-duty industrial systems,
- Protection of Equipment Connected to Telephone or Signal Lines, Such as Security Systems, Railroad Equipment, Fire Alarm Systems, Etc
- For the purpose of protecting against electrical surges and spikes, including those caused by lightning.
- Arc Suppression Across Relay and Switch Contacts
- Scaled-down versions of these devices are sometimes installed in residential service entrance electrical panels, to protect equipment in a household from similar hazards

Features:

- Nanosecond Switching Response Time, <15 ns, with Minimal Lead Length.
- Various noisy applications requires high performance filter.
- No Extinguishing or Follow-On Current Limitations.

Benefits:

- Eliminates Dangerous Voltage Transients.
- Lowers Overall System Costs by Reducing Downtime and Maintenance Costs.
- Improves Component and System Reliability.
- Reduces EMP/RFI Interference.

FILTERS SELECTION TABLE

SN	PART NO	RATED CURRENT @40°C A	LEAKAGE CURRENT 250V/50Hz mA	MECHANICAL DIMENSION L X W X H (mm)	CONNECTION TYPE
1	BLIC02-01-F	1	0.75	31 X 56 X 24	FAST ON
2	BLIC02-03-F	3	0.75	31 X 56 X 24	FAST ON
3	BLIC02-06-F	6	0.75	31 X 56 X 24	FAST ON
4	BLIC02-10-F	10	0.75	31 X 56 X 24	FAST ON

REMARK

**** FASTON TERMINAL SIZE 6.38 X 0.8 mm**

INSERTION LOSS(dB)

1A

MHZ	0.5	1	2	5	10
CM	35	39	41	37	38
DM	17	22	28	37	39

3A

MHZ	0.5	1	2	5	10
CM	30	34	37	38	39
DM	17	21	35	49	38

6A

MHZ	0.5	1	2	5	10
CM	21	27	30	38	41
DM	16	21	31	38	39

10A

MHZ	0.5	1	2	5	10
CM	13	19	28	31	37
DM	13	18	27	32	45

CORPORATE OFFICE AND MANUFACTURING UNIT

**BLA ETECH PVT LTD
A-42
WAZIRPUR INDUSTRIAL AREA
NEW DELHI-110052
INDIA**



CONTACT DETAIL

WEB- www.blaetech.com

Email- info@blaetech.com

TEL- +91-11-47483290

Mob-+91-9899197050